CIRMM

Nomura LAB. [Physics and device applications of Integrated quantum electronic systems]

Center for International Research on MicroNano Mechatronics

http://www.nlab.iis.u-tokyo.ac.jp

Integrated Quantum Electronics

Department of Electronic Engineering and Information Systems

Thermal conduction nanoengineering and Thermoelectric energy harvesting

Coherent control of heat transfer in semiconductor nanostructures by phononics

Thermal conduction, which is normally unique to a particular material, can be controlled by nanoengineering. Our goal is to use nanofabrication technology to develop highly efficient silicon thermoelectric devices for energy harvesting and thermoelectric applications.

Thermal conduction control by nanostructuring ~Si phononics~ Heat transport in semiconductor nanostructures and thermoelectric applications Physics in optomechanical systems with photonic crystal nanocavity





Fig. 1. One dimensional PnC and its band diagram. LA and TA phonon mean free path in bulk Si and cumulative thermal conductance.



Neck size 60 nm 500 nm 500 nm 500 nm 4 500 nm 500 nm 6 500 nm 500 nm 500 nm 500 nm

brane brane brane 20 00 0 10 20 30 00




Fig. 2. SEM of 1D PnC structures and Simulated heat dissipation in a 1D PnC structure and the TDTR signal.

Fig. 3. Micro Time-domain thermoreflectance system. TDTR signal and thermal conductivities of Si nanowires and phononic crystal nanostructures.

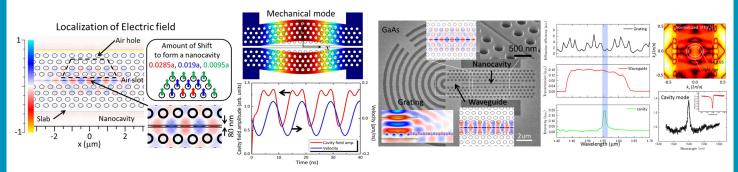


Fig. 4. Electric field localization in photonic crystal nanocavity and the fundamental vibration mode o the nanomechanical oscillator.

Fig. 5. Investigated GaAs optomechanical system with an air-slot PhC nanocavity and its optical properties.

Partially collaboration with Hirakawa Lab. and Arakawa-Iwamoto Labs.