**Electrochemical Materials and Processes** 

# YAGILAB.

### [Electrochemical Materials and Processes]

Integrated Research Center for Sustainable Energy and Materials

http://www.yagi.iis.u-tokyo.ac.jp/


**Energy Storage Materials Engineering** 

**Department of Materials Engineering** 




Electrochemical reactions convert chemical energy to electrical energy and vice versa. Rechargeable batteries store electrical energy as chemical energy, and convert the chemical energy to electrical energy when necessary. For example, electrochemical reactions generate hydrogen and oxygen through water decomposition, and allow for metal and oxide deposition. In our laboratory, we investigate rechargeable batteries using multivalent cations as carrier ions (specifically, magnesium rechargeable batteries) and electrochemical catalysts for efficient and fast electrochemical reactions.

## **Magnesium Rechargeable Battery**

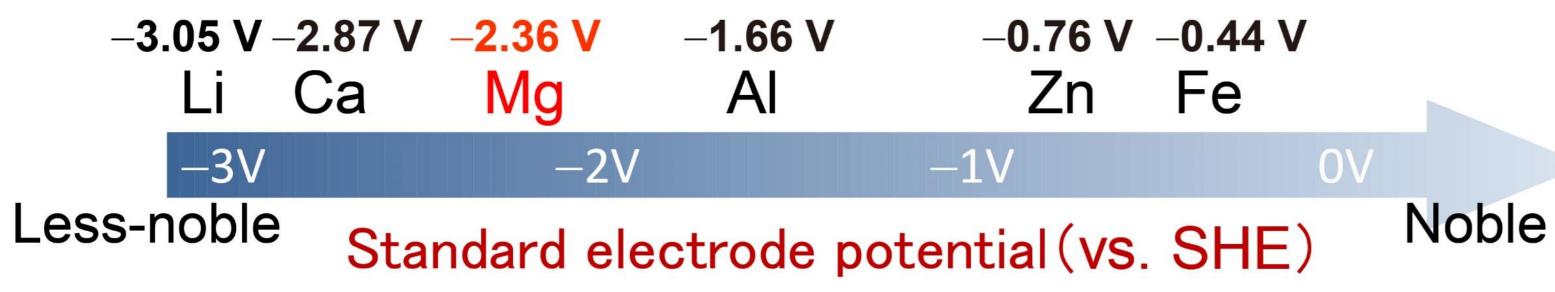

Standard electrode potential. Metals with large negative standard electrode potentials tend to release electrons to form cations. By using such a metal as a negative electrode active material, a large electromotive force can be achieved. Mg possesses two valence electrons and has the lowest standard electrode potential (ca. -2.36 V vs. SHE) among the air-stable metals. Thus, we investigate Mg batteries as potential rechargeable batteries with high electromotive force, high energy density, and ease of handling.

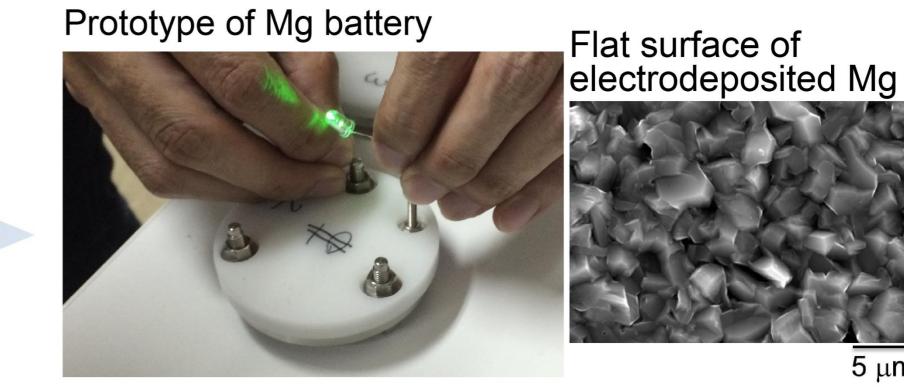

Potential (V vs. SHE) Capacity (mAh/g) Capacity (mAh/cc)

### **Electrochemical Catalyst**

the air as a positive electrode active material. Excellent electrochemical catalysts are required to enhance the reaction we explore the universal descriptors of catalytic activity in terms of with the help of researchers in solid-state chemistry from within and outside the university. We also prepare prototypes of the electrochemical devices and evaluate them. The electrochemical

Mg	-2.36	2200	3830
LiC <sub>6</sub>	-2.8	372	841
Li	-3.05	3860	2070

**Electrical capacity of Li, graphite (LiC<sub>6</sub>), Mg.** Mg metal can be used as an active material because it hardly forms dendrites, while Li metal cannot be used because of dendritic growth, which causes detachment and short-circuiting.

